

D-Link DVG 2001S

W celu zalogowania się do urządzenia D-link DVG 2001 proszę w słuchawce telefonu wybrać **1.
Lektor poda adres IP bramki, pod który proszę się udać w przeglądarce internetowej.
Użytkownik i hasło: admin

Proszę sprawdzić następujące pola:

W zakładce "Advanced" -> "Server Configuration"

Server FQDN - enabled

Domain Name - sip.easycall.pl

Service Domain - sip.easycall.pl

Port - 5060

Register Expiration - 180

Session Expires - 180

Min-SE - 180

Codec Priority - G729a,



D-Link
Building Networks for People

DVG-2001S
VoIP Terminal Adapter

Home **Advanced** Tools Status Help

SIP Configuration:
 Server Configuration Provisioning STUN Configuration User Agent Peer to Peer Telephony

SIP Configuration-Server

Server FQDN

IP Address

Domain Name

Port

Outbound Proxy State

Outbound Proxy Sever FQDN

Outbound Proxy IP Address

Outbound Proxy Domain Name

Outbound Proxy Port

Use DNS-SRV disabled enabled

DNS-SRV Query Domain

Service Domain

URL Format

User Parameter Phone

Use DNS-SRV disabled enabled

DNS-SRV Query Domain

Service Domain

URL Format

User Parameter Phone

Caller ID Delivery

Display CID

Timer T2 sec

Initial Unregister

Register Expiration sec

Session Expires sec

Min-SE sec

Session Expires Refresher

Codec Priority & Packet Interval

G.711a-law	<input type="text" value="3rd"/>	<input type="text" value="20"/> ms
G.711u-law	<input type="text" value="2nd"/>	<input type="text" value="20"/> ms
G.729a	<input type="text" value="1st"/>	<input type="text" value="20"/> ms
G.726	<input type="text" value="4th"/>	<input type="text" value="20"/> ms
iLBC	<input type="text" value="no-use"/>	<input type="text" value="20"/> ms




Apply Cancel Help

Następnie w "Advanced" -> "User Agent"

Phone Number - [6-cio cyfrowy numer użytkownika SIP]

Display Name - [6-cio cyfrowy numer użytkownika SIP]


Authentication Username - [6-cio cyfrowy numer użytkownika SIP]

User Agent Port - 5060

Password - [hasło użytkownika SIP]

Retype Password - [hasło użytkownika SIP]

Po wprowadzeniu danych, należy wcisnąć „Apply”.

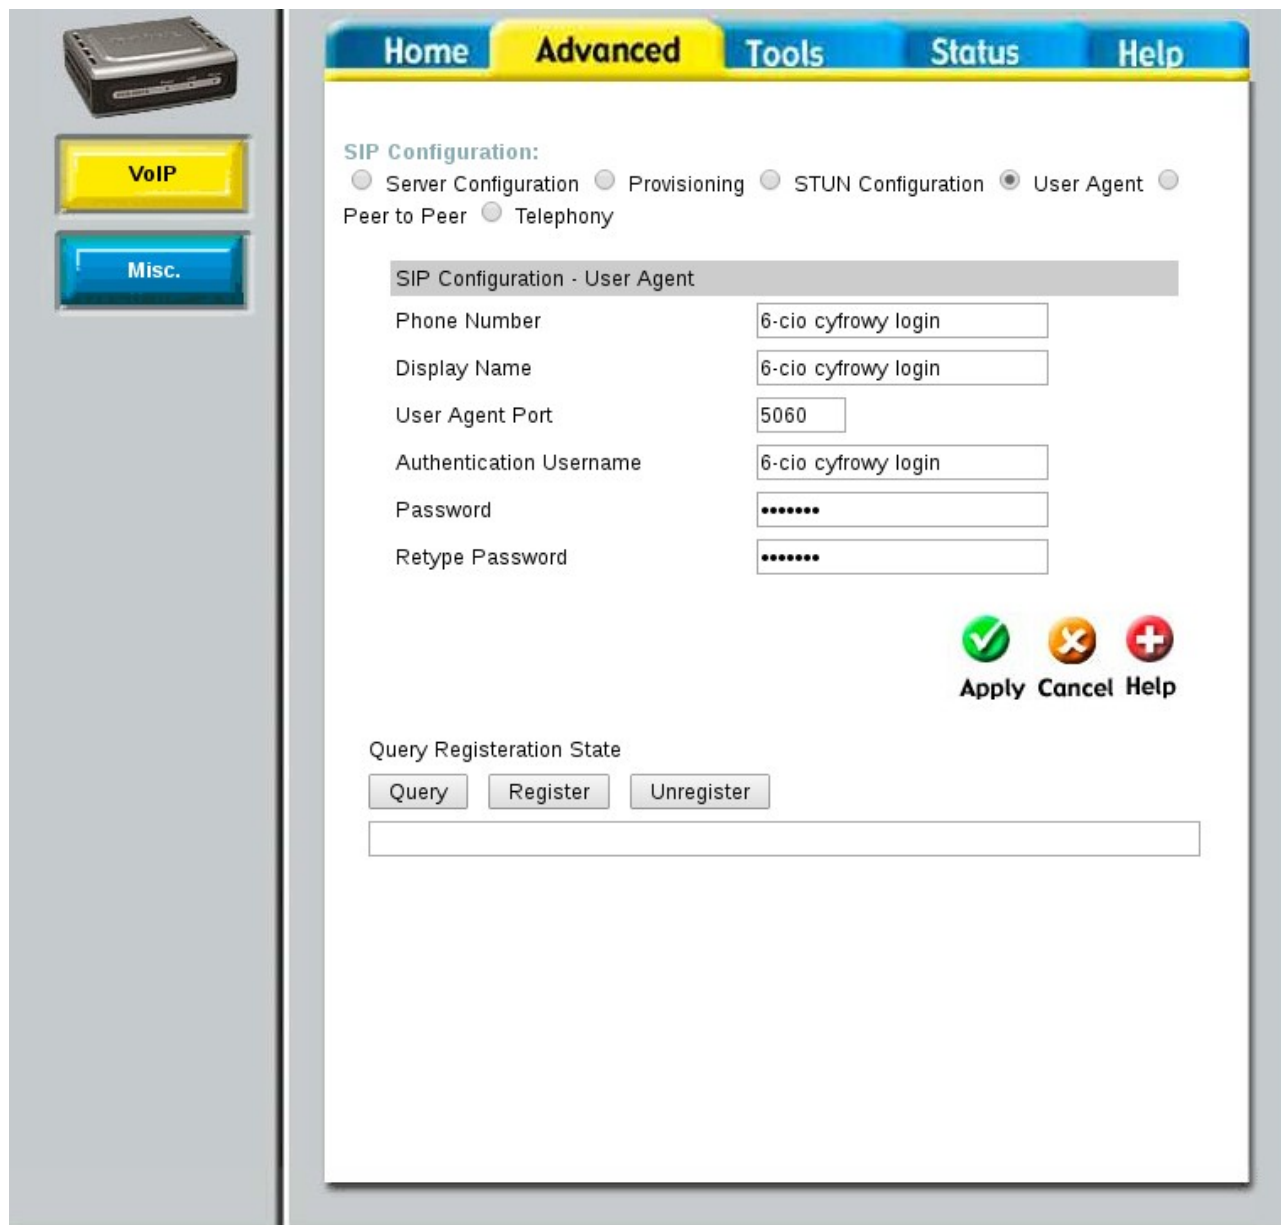

The screenshot shows a web interface for configuring a SIP User Agent. On the left, there is a sidebar with a device image and two buttons: "VoIP" (yellow) and "Misc." (blue). The main content area has a navigation bar with "Home", "Advanced" (selected), "Tools", "Status", and "Help". Below the navigation bar, the "SIP Configuration" section is active, with radio buttons for "Server Configuration", "Provisioning", "STUN Configuration", "User Agent" (selected), and "Peer to Peer". Underneath, there are radio buttons for "Telephony". The "SIP Configuration - User Agent" section contains several input fields: "Phone Number" (6-cio cyfrowy login), "Display Name" (6-cio cyfrowy login), "User Agent Port" (5060), "Authentication Username" (6-cio cyfrowy login), "Password" (masked with dots), and "Retype Password" (masked with dots). At the bottom right of this section are three icons: a green checkmark (Apply), an orange 'x' (Cancel), and a red plus sign (Help). Below this is a "Query Registration State" section with three buttons: "Query", "Register", and "Unregister", followed by a large empty text input field.